

SLP-T400

4 inch Thermal Transfer
Desktop Label Printer



Retail



Healthcare
&
Pharmacy



Post &
Parcel



Warehouse &
Storage
Handling

Durable and Specialized



Advanced Form Factor

- Paper feeding speed up to 6 ips (152 mm/sec)
- Thermal Transfer, Direct Thermal supported
- Wide range of ribbon rolls length from 74m to 300m
- Triple interface on board standard
- Optional RFID model (SLP-T400R)

Enhanced Firmware

- Multiple programming languages recognizable :
SLCS, BPL-Z™, BPL-E™
- The label format can be stored in the printer and can be reused 2D Barcode printing
- 23 Code pages supported



SLP-T400


4 inch Thermal Transfer
Desktop Label Printer



Features


All-in-one interface

- **Standard:**
USB + Serial + Parallel
- **Optional:**
USB + Serial + Ethernet

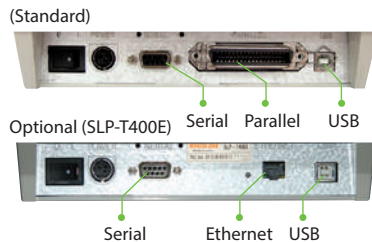

User-friendly design

- Wide range of ribbon capacity
- Easy paper loading with adjustable paper guide
- Pause and cancel function-keys

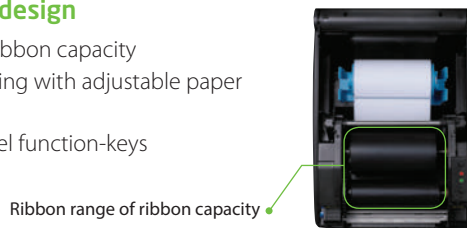

Multiple programming languages recognizable

The SLP-T400 is compatible with market-leading programming language;
SLCS, BPL-Z™, BPL-E™.



Label Artist™

Bixolon provides its custom label design program as bundle. It supports *database* connection as well as text, drawing lines and boxes, all kinds of graphics and 1D/2D Barcode printing.

Specifications

Print Characteristics

Printing Method: Thermal Transfer, Direct Thermal
Printing Speed: SLP-T400: Up to 6 ips (152 mm/sec)
SLP-T403: Up to 4 ips (100 mm/sec)
Print Resolution: SLP-T400: 203 dpi / SLP-T403: 300 dpi
Printing Width: SLP-T400: Up to 104 mm / SLP-T403: Up to 105.7 mm
Printing Length: 6 ~ 1000mm
Sensor: Transmissive, Reflective (adjustable), Ribbon-End, Head open

Media Characteristics

Media Type: Gap, Black Mark, Notch, Continuous, Fan-Fold
Media Width: 15 ~ 116 mm
Media Roll Diameter: Up to 130 mm
Media Thickness: 0.06 ~ 0.20 mm
Supply Method: Easy Paper Loading

Ribbon Characteristics

Ribbon Type: Wax, Wax / Resin, Resin, Outside
Ribbon Width: 33 ~ 110 mm
Ribbon Length: Up to 300 m
Core Inner Diameter: 25.4 mm, 12.5 mm

Physical Characteristics

Dimensions (W x L x H): 214 x 310 x 200 mm (8.42 x 12.20 x 7.87 inch)
Weight: 2.75 kg (6.06 lbs.)
Power: EnergyStar Certified, External Power Adaptor 100-240V AC, 50/60Hz

Performance Characteristics

Memory: 8MB SDRAM, 2MB FlashROM
Interface: Triple Interface
Standard: USB + Serial + Parallel
Optional: USB + Serial + Ethernet

Environment Characteristics

Temperature: Operating: 5 ~ 40 °C (41 ~ 104 °F)
Storage: -20 ~ 60 °C (-4 ~ 140 °F)
Humidity: Operating: 10 ~ 80% RH / Storage: 10 ~ 90% RH

Software

Emulation: SLCS, BPL-Z™, BPL-E™
Driver / Utility: Windows Driver, Linux CUPS Driver, Mac Driver, Virtual COM USB/Ethernet Driver, Utility Program, Label Artist™
SDK: Android SDK, Windows SDK

Fonts / Graphics / Symbolologies

Fonts:

- 10 SLCS Resident Bitmap Fonts
- One SLCS Resident Scalable Font
- 23 Code Page

Graphics: Supporting user-defined fonts, graphics, formats, and logos

Barcode Symbolologies

1D: Coda Bar, Code 39, Code 93, Code 128, EAN-8, EAN-13, IMB, Interleaved 2-of-5, ITF, UCC/EAN-128, UPC-A, UPC-E
2D: Data Matrix, MaxiCode, PDF417, QR code (select two only)

Options

Ethernet, RFID (Frequency: 885 ~ 955 MHz, Transmit Power: 1W, Modulation: ASK, Air Protocol: GEN2, Type: FHSS), Peeler, Auto Cutter, External Paper Supply

